



Model Numbers

ISAE-24	ISCE-24
ISAE-36	ISCE-36
ISAE-48	ISCE-48
ISAE-60	ISCE-60
ISAE-72	ISCE-72



Aeration baffles between burners spread heat across the griddle plate for even heating.



Thick highly polished steel griddle plate maintains selected temperatures.



Full width rear flue distributes heat uniformly across the griddle surface.



Stainless steel grease gutter and 1 gal. (3.8 L) grease can.



ISAE-36 shown

SNAP ACTION THERMOSTAT and BURNERS - Snap action thermostat control every 12" (305 mm) is ideal for high production kitchens.

- Temperature variance $\pm 7^\circ$ F for snap action and $\pm 2^\circ$ F for the solid state (ISCE) models.
- Each "U" shaped burner is rated at 24,000 BTU (7 KW) and located every 12" (305 mm).
- Aeration baffles between burners spread the heat evenly across the entire griddle surface.
- Each burner has a standing pilot for instant ignition.

GRIDDLE PLATE - Highly polished 1" (25 mm) thick steel plate holds temperature and has a quick recovery.

- Full 24" (610 mm) plate depth for more cooking surface and high production yields.
- High splash guard sides with a 4" (102 mm) rear splash guard for easy clean-ups.
- Surface is ideal for a large range of menu items.
- Optional chrome and grooved griddle top are available as an option.


GREASE MAINTENANCE - Stainless steel grease gutter is 4" (102 mm) wide.

- Large 1 gal (3.8 L) capacity grease can has a weep hole to indicate when full.
- Grease can removes easily.

EXTERIOR - Stainless steel front, sides, splash guard, and ledge.

- Stainless steel ledge is one piece rolled for cleaning convenience.
- Range match profile when placed on a refrigerated base or equipment stand.
- Control knobs are constructed of virtually unbreakable plastic for protection grip.
- 4" (102 mm) stainless steel legs are included.
- One year parts and labor warranty.



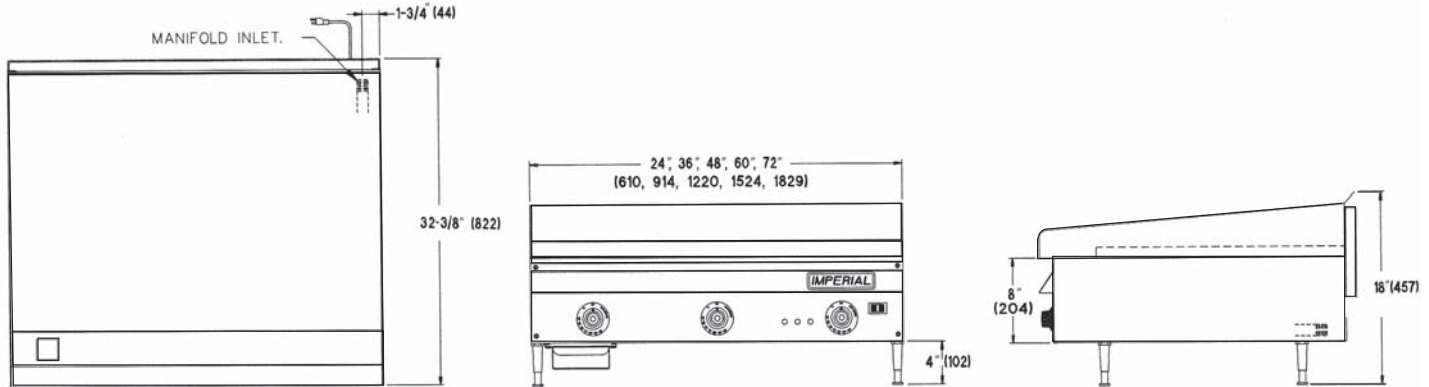

SNAP ACTION GRIDDLES

MODEL	WIDTH	NUMBER OF BURNERS	GAS OUTPUT		SHIP WEIGHT	
			BTU	(KW)	(KG)	LBS
ISAE-24	24" (610 mm)	2	48,000	(14)	(140)	310
ISAE-36	36" (914 mm)	3	72,000	(21)	(199)	440
ISAE-48	48" (1219 mm)	4	96,000	(28)	(265)	585
ISAE-60	60" (1524 mm)	5	120,000	(35)	(333)	735
ISAE-72	72" (1829 mm)	6	144,000	(42)	(400)	885

Measurements in () are metric equivalents.

MANIFOLD PRESSURE		MANIFOLD SIZE
NATURAL GAS	PROPANE GAS	SIZE
5.0" W.C.	10.0" W.C.	3/4" (19 mm)

Specify elevation, if over 2,000 ft.

ELECTRICAL REQUIREMENT			
VOLTS	PHASE	HERTZ	AMPS MAX.
120V	1	60	2 amps

6ft. (1829 mm) power cord with 3 prong plug provided

SNAP ACTION GRIDDLES with SOLID STATE THERMOSTATS

MODEL	WIDTH	NUMBER OF BURNERS	GAS OUTPUT		SHIP WEIGHT	
			BTU	(KW)	(KG)	LBS
ISCE-24	24" (610 mm)	2	48,000	(14)	(140)	310
ISCE-36	36" (914 mm)	3	72,000	(21)	(199)	440
ISCE-48	48" (1219 mm)	4	96,000	(28)	(265)	585
ISCE-60	60" (1524 mm)	5	120,000	(35)	(333)	735
ISCE-72	72" (1829 mm)	6	144,000	(42)	(400)	885

Measurements in () are metric equivalents.

CLEARANCE REQUIREMENTS
For use only on non-combustible surfaces. Provide 0" clearance from non-combustible surfaces and 6" (152 mm) from combustible surfaces.

- OPTIONS AND ACCESSORIES**
- Stainless steel equipment stands
 - 6" (152 mm) casters for equipment stands
 - 7" (178 mm) deep, stainless steel front landing ledge
 - 9" (229 mm) deep, stainless steel front landing ledge
 - Chrome griddle top, (add CG to model number)
 - Grooved griddle top, (add GG to model number)
 - Extra grease can

MODEL	GRIDDLE PLATE DIMENSIONS		CRATED DIMENSIONS	
	DIMENSIONS	DIMENSIONS	DIMENSIONS	DIMENSIONS
ISAE-24, ISCE-24	24" w x 24" d (610 x 610 mm)	24" w x 32-3/8" d x 18" h (610 x 822 x 457 mm)	26-1/2" w x 36" d x 16-1/2" h (673 x 914 x 419 mm)	
ISAE-36, ISCE-36	36" w x 24" d (914 x 610 mm)	36" w x 32-3/8" d x 18" h (914 x 822 x 457 mm)	38-1/2" w x 36" d x 16-1/2" h (978 x 914 x 419 mm)	
ISAE-48, ISCE-48	48" w x 24" d (1219 x 610 mm)	48" w x 32-3/8" d x 18" h (1219 x 822 x 457 mm)	50-1/2" w x 36" d x 16-1/2" h (1283 x 914 x 419 mm)	
ISAE-60, ISCE-60	60" w x 24" d (1524 x 610 mm)	60" w x 32-3/8" d x 18" h (1524 x 822 x 457 mm)	62-1/2" w x 36" d x 16-1/2" h (1588 x 914 x 419 mm)	
ISAE-72, ISCE-72	72" w x 24" d (1829 x 610 mm)	72" w x 32-3/8" d x 18" h (1829 x 822 x 457 mm)	74-1/2" w x 36" d x 16-1/2" h (1893 x 914 x 419 mm)	



1128 Sherborn Street Corona, CA 92879
800.343.7790 Ph: 951.281.1830 Fx: 951.281.1879
www.imperialrange.com
E-mail: imperialsales@imperialrange.com